


EN Manual sweeper



- **WARNING:** read the instructions carefully before use.


BlueStar BSW950

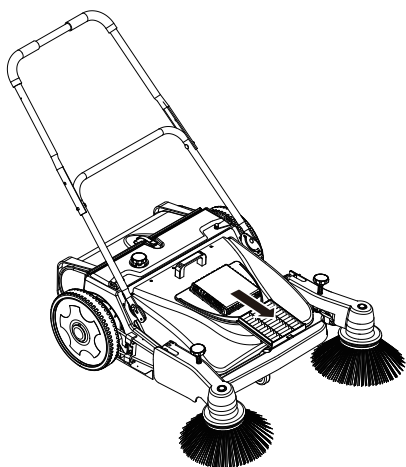

SPECIFICATION

Working width	950mm
Bin Capacity	45L
Maximum Theoretical Area Performance	3800 m ² /h
Net weight	25kg
Packing size	880x800x390 mm


STANDARD PRODUCTS AND SPARE PARTS IN THE BOX

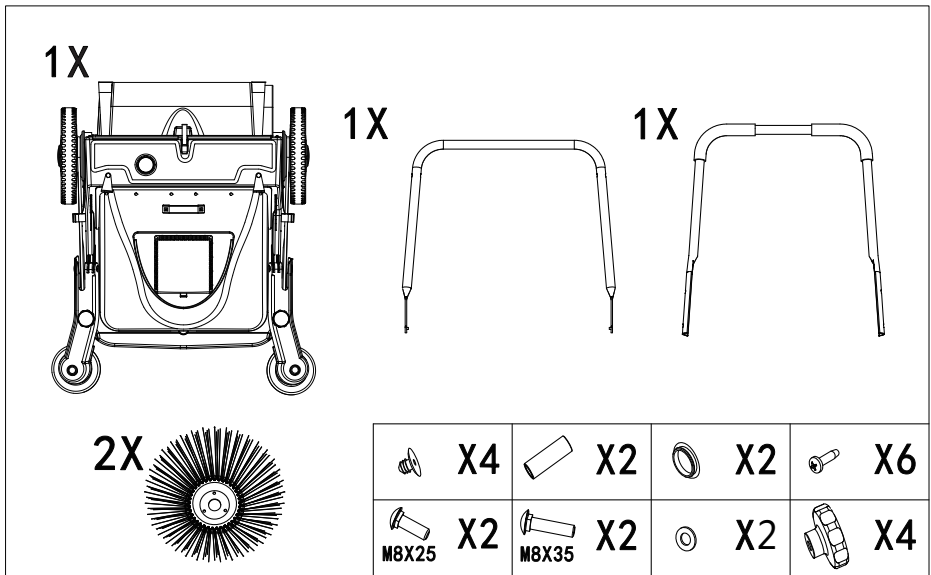

Sweeper body

Handle and bolts


Side brush and screws

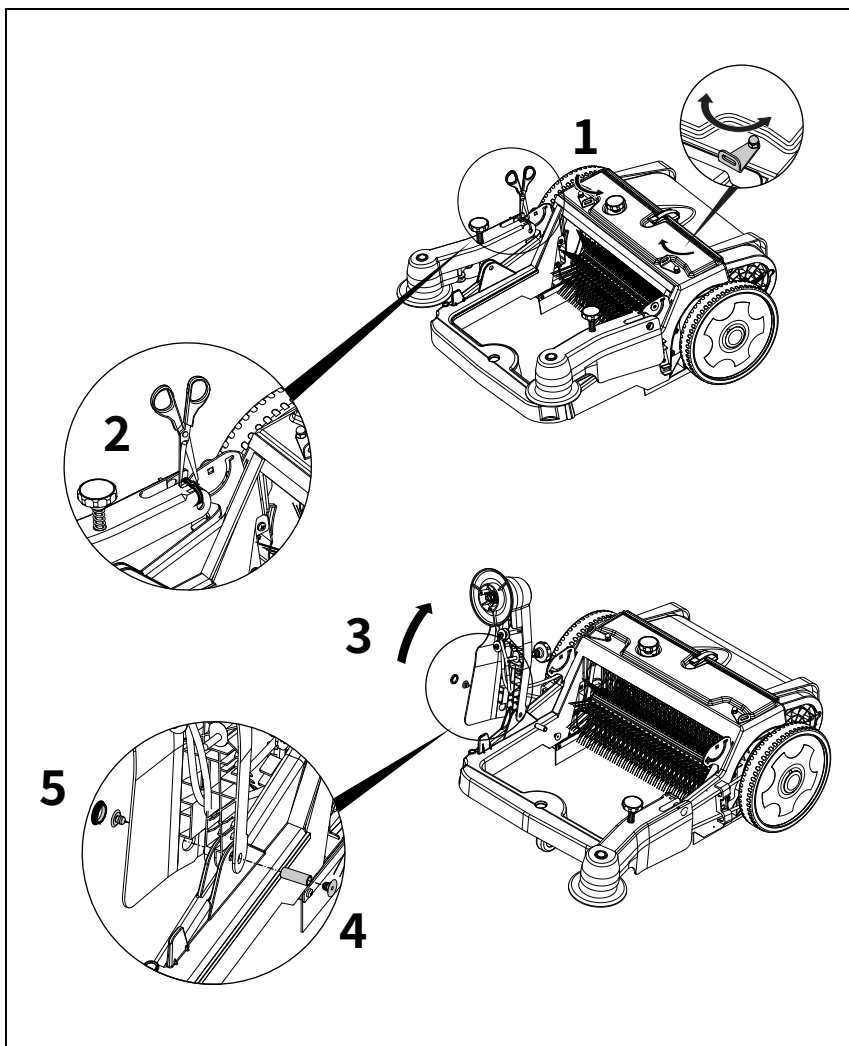

STEP 1 Install arm

Remove the bin and cut the cable tie. Lift the arm and align the holes, insert the tube and block both sides.


Note: When you take off the arm, don't remove the belt or rotate the arm. It may cause the belt to turn wrong.

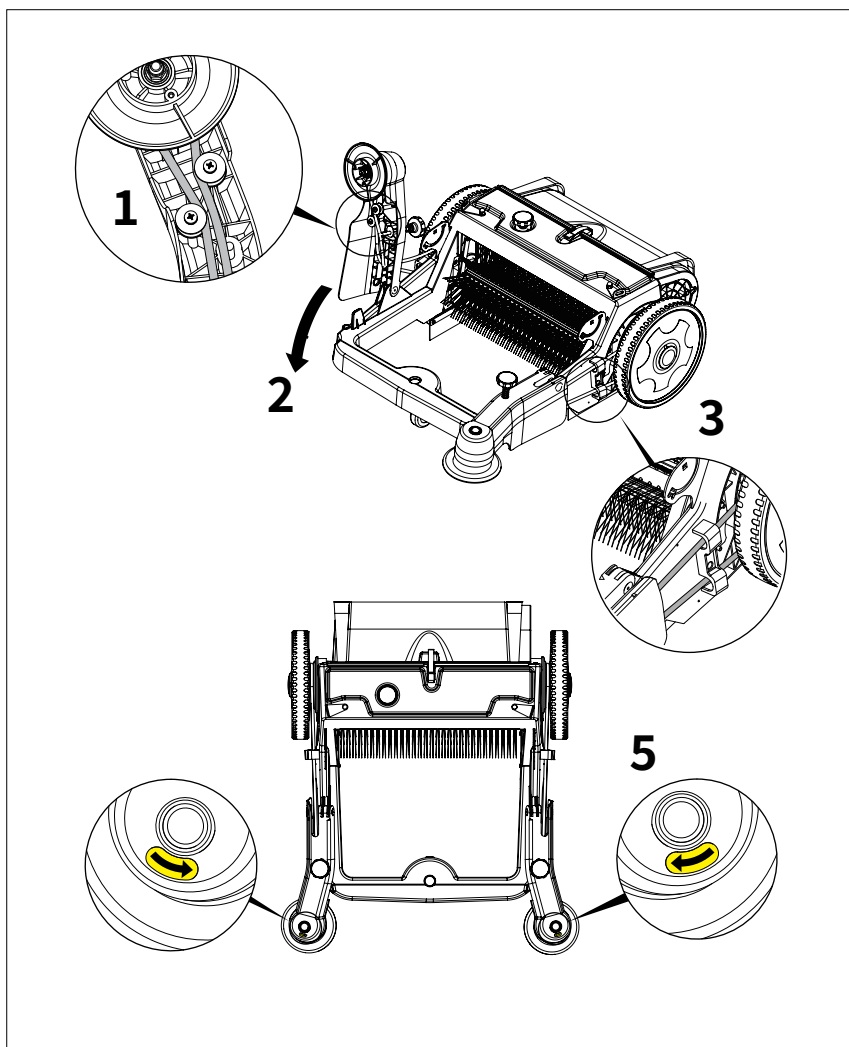

STEP 2 Return driving belt


Make the belt into the example 1 and put down the arm. And make the belt into the example 3. Then push the manual sweeper and make sure the rotation direction of the turntable is same as the label.

Note: To avoid confusion, install one side and then install the other side.

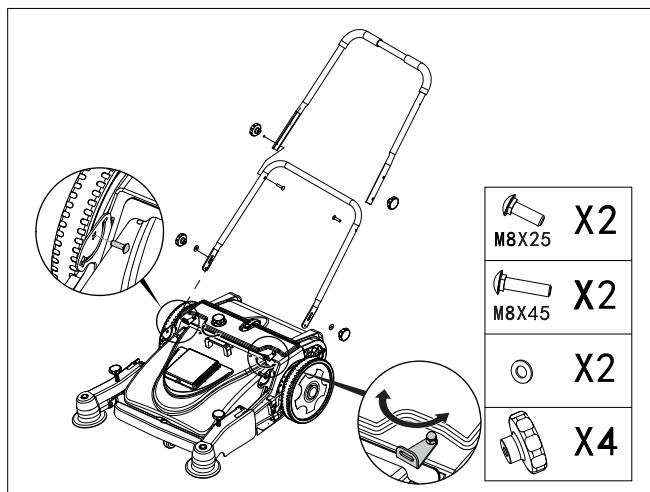

STEP 3 Handle assembly

Install the bin and lock it. Then install the handle.

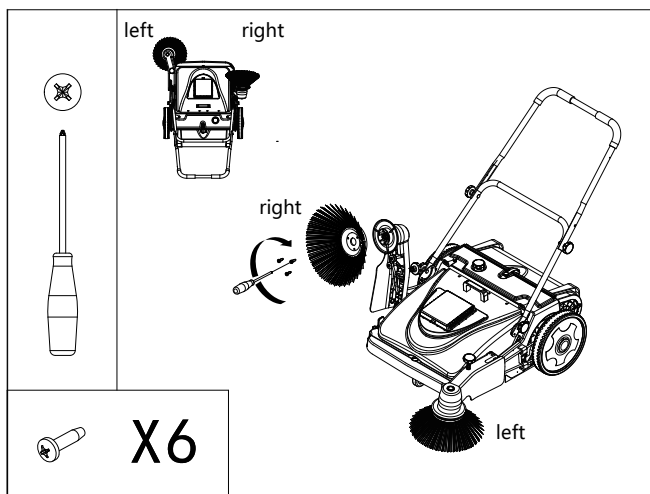


STEP 4 Side brush installation

According to the label on the front brush to distinguish the left and right side brush.

Three screws to set up each side brush.


Brush height adjustment

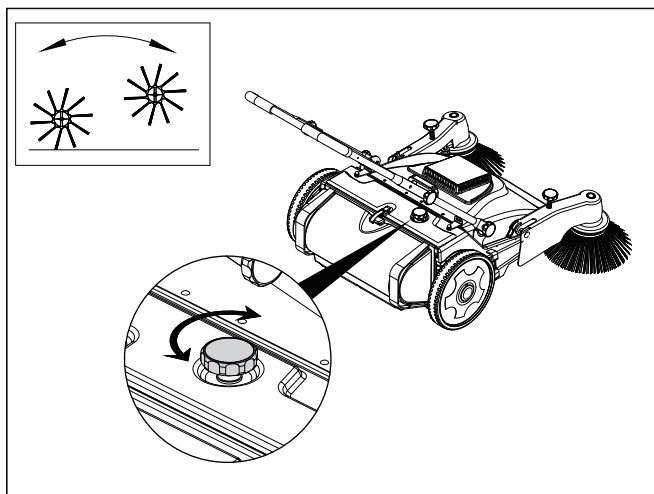

Main brush height turning knob

Lower the brush: counterclockwise rotate the knob



Raise the brush: clockwise rotate the knob

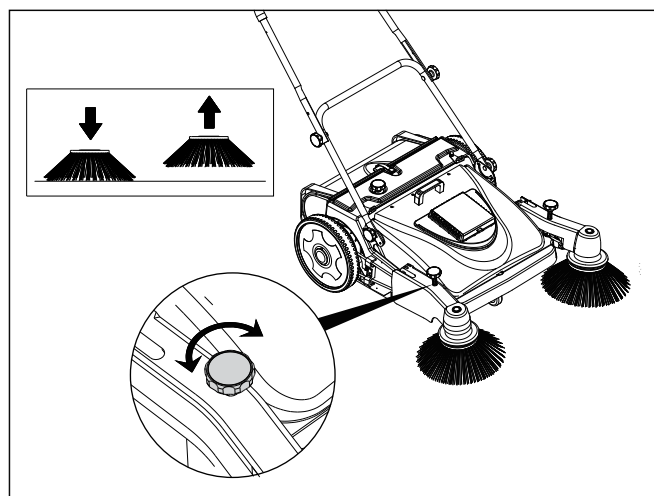



Side brush height turning knob

Lower the brush: counterclockwise rotate the knob



Raise the brush: clockwise rotate the knob

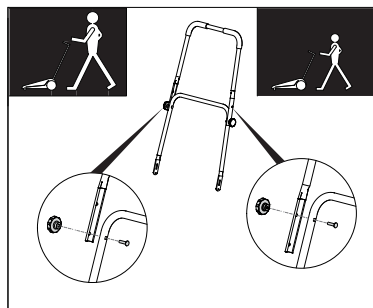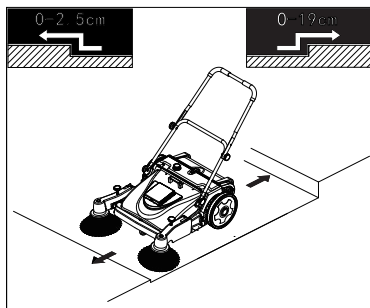


- The cleaning surface should be competitive flat and height difference $\leq 2.5\text{cm}$. Walking the step in the opposite direction $\leq 19\text{cm}$.
- Adjust the height of handle for need.

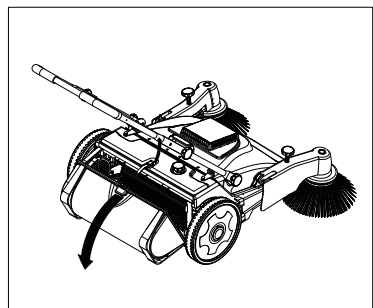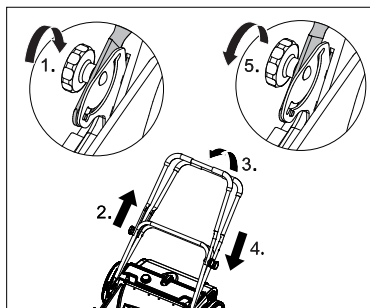




- Adjust the angle of handle for need.
- Open metal button then pull back to unload back bin.

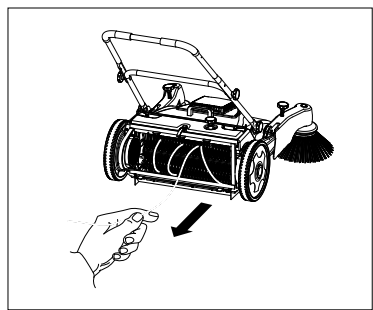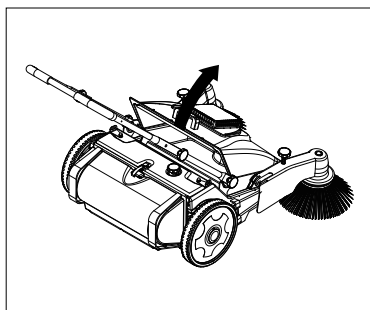



- Turn metal knob and lift to unload front bin.
- When the main brush is entangled in garbage, it should be taken out by reversing the roller brush.

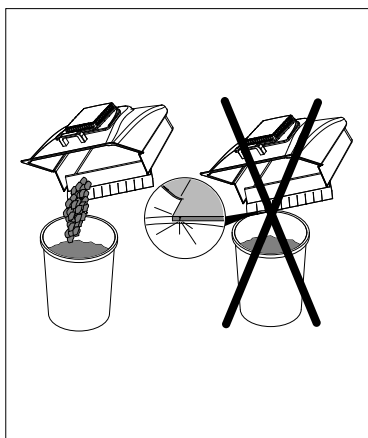

- Crashing bin is forbidden.
- Install the ground lip on the back of main brush.

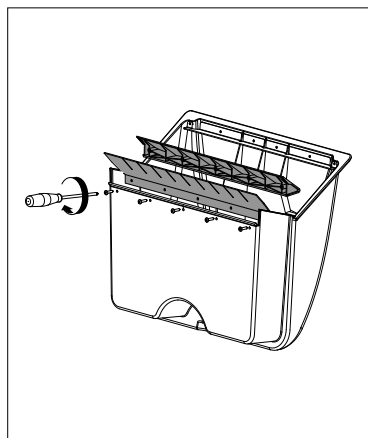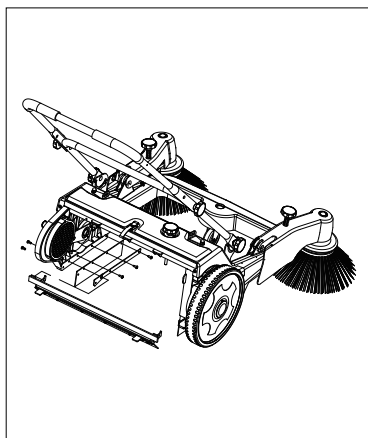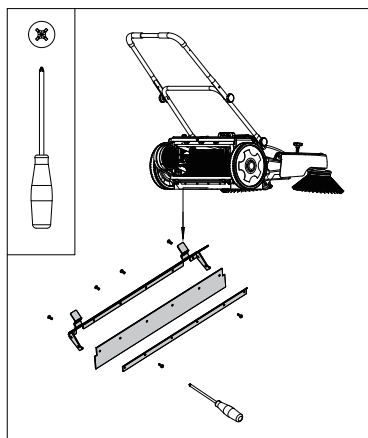

- Set up the ground lip of both sides of main brush.
- Install bin seal baffle.

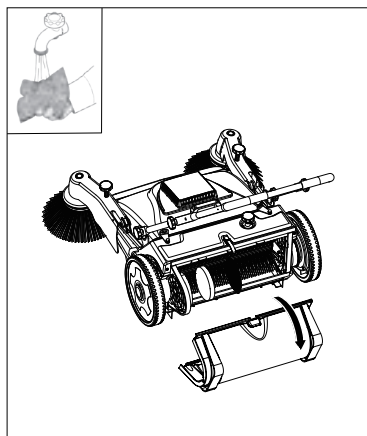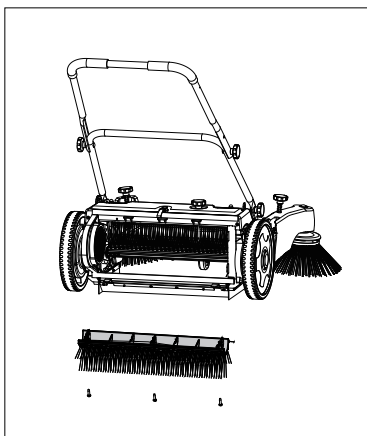

- Main brush unload installing.
- Clean filter in time.


The sponge filter can be washed with water, dried and used.





- To clean the top filter, please use a brush to clean it, do not flush with water.



loosen the turning knob

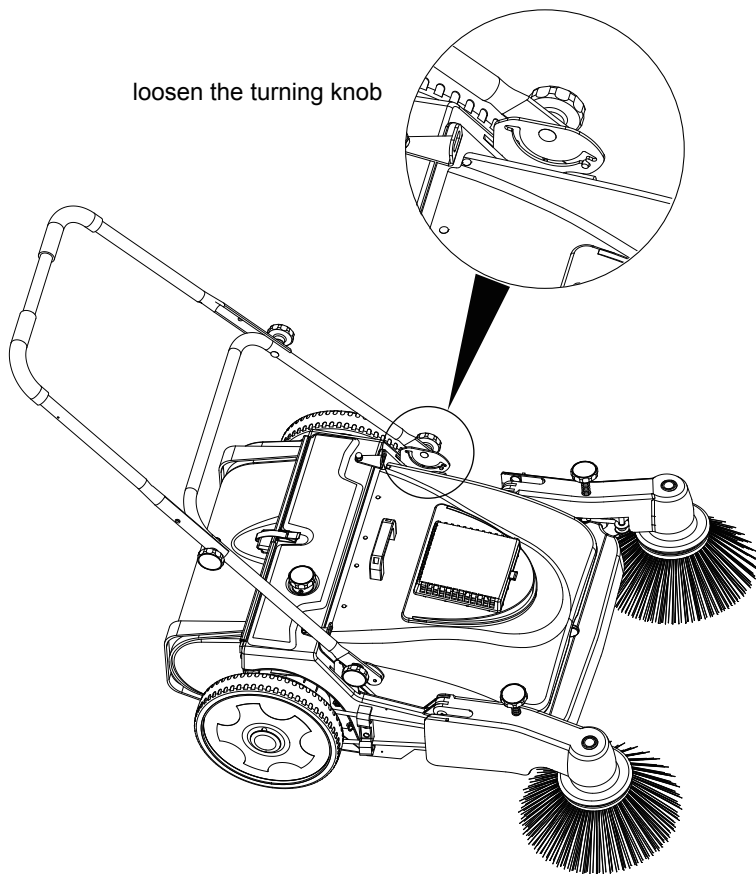

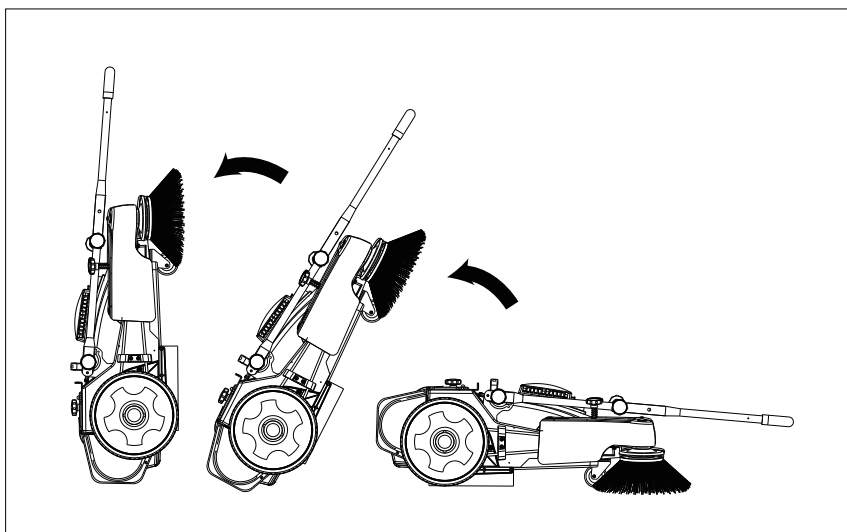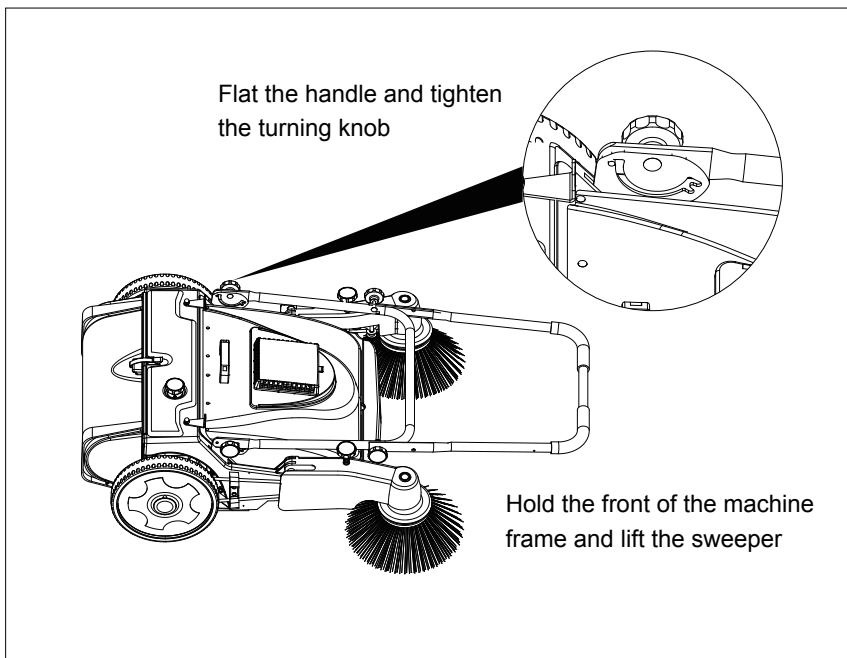

NO.	Name	NO.	Name
1	Handle	22	Nut M8
2	Turning knob	23	Pressing plate
3	Washer 8	24	Body frame
4	Rear bin	25	Arm Plug
5	Sliding handle parts	26	Metal sleeve plug
6	Saucer-head Screw Mx45	27	Left side brush arm components
7	Sponge filter	28	Sleeve
8	Screw ST5.5X22	29	Screw St3.5x13
9	Armrest plate	30	Belt guide plate
10	Saucer-head Screw M8x25	31	Spring
11	Wheel cap	32	Bolt M8X35
12	Shaft ring 20	33	Cross recessed disc head screw M6X45
13	Washer 20	34	Washer 6
14	Wheel	35	Right side brush arm components
15	Round belt	36	Side brush
16	Nut M6	37	Screw ST4.8X22
17	wheel support components and rolling brush	38	Saucer-head Screw M10x75
18	Turning knob	39	Castor
19	Pad 8	40	Washer 10
20	Buckle	41	Nut M10
21	Screw St3.5x16	42	Bin components

Distributeur:

www.exclusiva.nl

Dynamostraat 11
1014 BN Amsterdam